

# 870~960MHz 90° 15.5dBi

## GSM 900MHz DUAL POLAR PANEL ANTENNA

**Model No . ABDBS099015 / (3) / (6)**

### Electrical specifications


<b>Frequency range</b>	<b>870~960MHz</b>
<b>Gain</b>	<b>15.5dBi</b>
<b>VSWR/50 Ohms</b>	<b>&lt; 1.4</b>
<b>Horizontal beamwidth</b>	<b>90°</b>
<b>Vertical beamwidth</b>	<b>10°</b>
<b>Polarization</b>	<b>±45°</b>
<b>Cross-polar discrimination</b>	<b>&gt; 15 dB</b>
<b>Maximum input power</b>	<b>600 W</b>
<b>Isolation</b>	<b>&gt; 28 dB</b>
<b>Electrical downtilt</b>	<b>0° / 3° / 6°</b>
<b>Front-to-back ratio</b>	<b>&gt;30dB</b>
<b>Connector</b>	<b>2×N- Female , 2×7/16 Female</b>
<b>IM.3rd order(2×43dBm)</b>	<b>&lt; -107 dBm</b>
<b>Lightning protection</b>	<b>Direct ground</b>



### Mechanical specifications

<b>Dimensions of antenna (L×W×H)</b>	<b>1935 mm×268mm ×140mm</b>
<b>Weight of antenna</b>	<b>11.2Kg</b>
<b>Weight of mounting kits</b>	<b>2.75Kg</b>
<b>Installation position Adjustment</b>	
<b>Horizontal</b>	<b>360°</b>
<b>Angle of pitch</b>	<b>0~15°</b>
<b>Diameter of installation pole</b>	<b>Φ 60~110 mm</b>
<b>Radome material</b>	<b>UV Protected PVC</b>
<b>Rated wind speed</b>	<b>200 Km/h</b>

Horizontal pattern

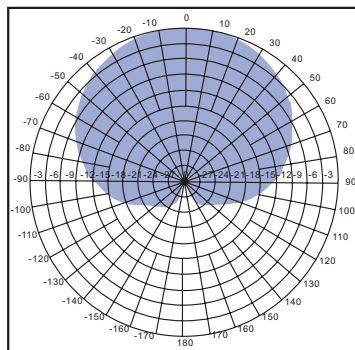

Vertical pattern

