

Features


- Permits rapid selection of frequency when operating in a tightly spaced channel environment.
- Integrated GSM/CDMA radio modem for remote configuration, monitor and control.
- Automatic gain stabilization prevents self oscillation caused by a low isolation between DT and MT antennas.
- Internal backup battery keeps the alarm unit running for up to 6 hours after power loss.
- Optional OMC is available for remote operation and maintenance of repeaters.
- Designed for all weather outdoor – waterproof, damp-proof and omni-sealed (IP65).



Product Description

The R-9122AC channel-selective repeater is designed for outdoor operation in the GSM900 band. Channel-specific linear amplifier and filtering effectively amplifies the desired BTS carrier and provides superior out-of-band rejection. Typical units incorporate up to 8 pairs (uplink and downlink) of channel modules with frequencies programmed to specific requirements of the network. Remote configuration and surveillance is possible through Comba's remote control and monitoring system, via laptop or wireless modem to the OMC. Li-ion battery backup ensures alarm signals are sent out in the event of power failure, and full battery backup ensures operation in unstable mains supply. The R-9122AC comes in a completely sealed, well-ventilated cast aluminum chassis, suitable for all weather conditions.

System Block Diagram (2-Ch)

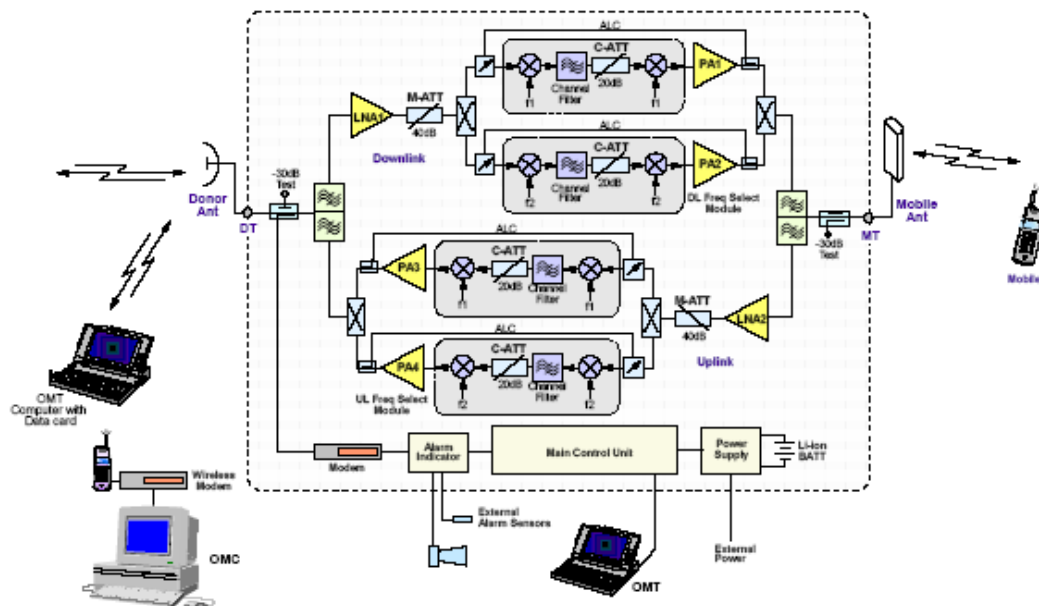

R-9122AG (II2)

GSM900 Channel Selective Repeater, 2W

Technical Specifications

Electrical, Power

Frequency Range, UL - [MHz]	890 - 915
Frequency Range, DL - [MHz]	935 - 960
No. of Channels	2 - 8
Max. System Gain - [dB]	95 ± 2 (2 ch) 92 ± 2 (4 ch) 85 ± 2 (6-8 ch)
Gain Adjustable Range - [dB] (1 dB step)	0-30 ± 1.5
Output Power / Channel - [dBm]	33 ± 1 (2 ch) 30 ± 1 (4 ch) 27 ± 1 (6-8 ch)
Pass Band Ripple, p-p - [dB]	≤ 3
System Noise Figure - [dB]	≤ 5 (typ. 4)
Group Delay - [µsec]	≤ 8
Channel Selectivity - [dB]	> -2 (± 100kHz) ≤ -60 (± 400kHz) ≤ -65 (± 600kHz) ≤ -70 (± 1MHz)
Spurious - [dBm]	
- 9kHz to 1GHz	≤ -36
- 1GHz to 12.75GHz	≤ -30
Intermodulation - [dBm]	≤ -36
Max. RF Input Power - [dBm]	+10
VSWR	≤ 1.5 (typ. 1.4)
Impedance - [Ω]	50
Power Supply - [VAC]	155-285 / 45-50Hz
Power Consumption (approx.) - [W]	150 (2/4 ch) 220 (6/8 ch)
MCU Battery Backup Time - [hr]	6 (approx.)
Power Up Waiting Time - [sec]	60 (approx.)

Mechanical, Environmental

Dimensions, L x W x H - [mm]	600 x 450 x 195 (2/4 ch) 600 x 450 x 295 (6/8 ch)
Housing Material	Aluminum
Housing Colour	Grey Anodised, RAL877U
Weight (approx.) - [kg]	37 (2/4 ch) 51 (6/8 ch)
Connector Type	N-Female or 7/16 DIN Female
Operating Temperature - [°C]	-40 to +55
Operating Humidity - [%]	≤ 95
Cooling	Convection
MTBF - [hrs]	> 50,000
Environmental Class	IP65

Operation & Maintenance

Local Monitoring Feature	PC via RS232
Remote Data Transfer	via Line modem, build-in wireless GSM modem (data or SMS)
Local and Remote Controlled Parameters	Channel No., ATT, Soft ON/OFF, Oscillation Elimination ON/OFF, Over-Temp Threshold, UL/DL Output Power Threshold, VSWR Threshold, Alarm Report Enable
Local and Remote Monitored Parameters	Alarms (LNA, PA, PLL unlock, Power Down, PSU Fault, Door Open, Self oscillation, Over Temp, VSWR, UL/DL Output Power Low), UL/DL Output Power, DL Input Power

Mechanical Outline Drawing

